


CAP SCREW AZ-100 SPEC

Products Spec : JIS B 1176/ DIN912/ ISO4762 Class A
 Material : SUS304CUN
 Tolerance Class : 6g
 Tensile strength : 1,000N/m m²
 0.2% Proof Stress : 800N/m m²

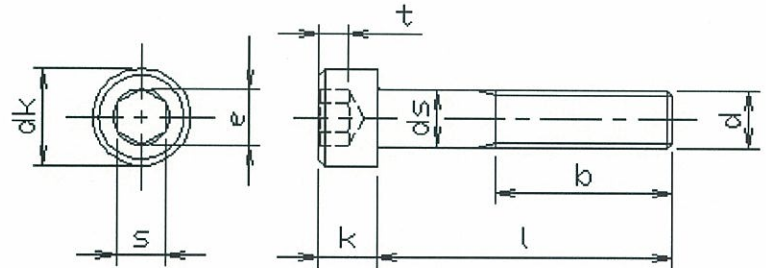

unit: mm

Nom.	Pitch	Diameter of unthread Shank		Head Diameter			Head Height		W.A.F			W.A.C	Driving Depth	thread
		d	P	ds		dk			k		s			e
	Coarse	Max.	Min.	Nom.Size	Max.	Min.	Max.	Min.	Nom	Max	Min	Min.	Min.	Approx
M6	1.0	6.0	5.82	10	10.22	9.78	6	5.70	5	5.14	5.02	5.723	3	24
M8	1.25	8.0	7.78	13	13.27	12.73	8	7.64	6	6.14	6.02	6.863	4	28
M10	1.50	10.0	9.78	16	16.27	15.73	10	9.64	8	8.175	8.025	9.149	5	32
M12	1.75	12.0	11.73	18	18.27	17.73	12	11.57	10	10.175	10.025	11.429	6	36
M16	2.0	16.0	15.73	24	24.33	23.67	16	15.57	14	14.212	14.03	15.996	8	44

*W.A.F Width Across Flats

*W.A.C Width Across Corner

The stock range for the items

	M6	M8	M10	M12	M16
12	stock				
15	stock				
20	stock	stock	stock		
25	stock	stock	stock		
30	stock	stock	stock	stock	stock
35		stock	stock	stock	stock
40		stock	stock	stock	stock
45		stock	stock	stock	stock
50		stock	stock	stock	stock
55				stock	stock
60				stock	stock
65				stock	
70				stock	



* Full thread above thick line.