

Stainless410 with Saima Super Passivation

410 SSP-1000 Self Drilling Screw

410 Stainless Steel : 1,000h Salt Spray Test.



HIGH SPEED & HIGH QUALITY

SAIMA CORPORATION


410 SSP-1000 Self Drilling Screw

Stainless410 with Saima Super Passivation



SSP-1000 Self Drilling screws have application provides **1,000 hours of Salt Spray Test.**

< Salt spray test: JIS Z2371 >

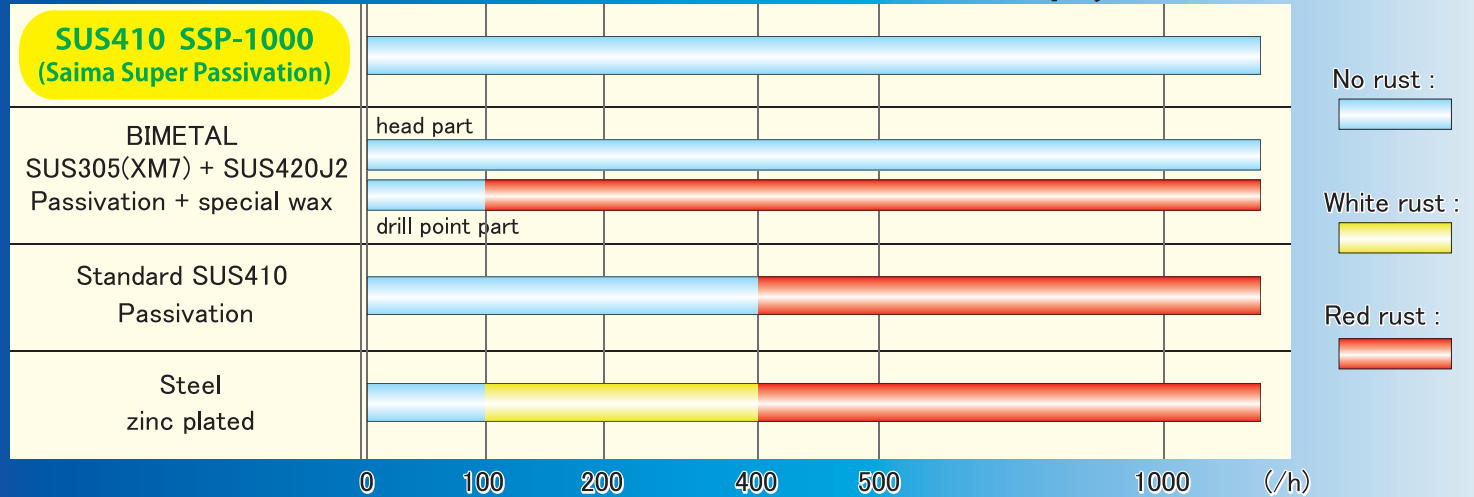


	100h.	200h.	400h.	1000h.
SUS410 SSP-1000 (Saima Super Passivation)				
BIMETAL SUS305(XM7) + SUS420J2 Passivation + special wax				
Standard SUS410 Passivation				
Steel zinc plated				

◀◀◀ **No rust , 1,000 hours!!**




410SSP-1000 Self Drilling Screw

Cross recess Pan head




SIZE	Panel Thickness	dk	k	Box q'ty / pcs
3.5x9.5 #6x3/8	0.9-2.3mm	6.7mm	2.5mm	2,000
13 1/2				1,000
16 5/8				1,000
19 3/4				1,000
4.2x9.5 #8x3/8	0.9-2.3mm	8.0mm	3.0mm	1,000
13 1/2				1,000
16 5/8				1,000
19 3/4				1,000
25 1				500
30 1-3/16				500
35 1-3/8				400
40 1-5/8				400
45 1-3/4				300
50 2				300
55 2-3/16				250
60 2-3/8	250			
70 2-3/4	150			
4.8x13 #10x1/2	1.5-3.2mm	8.0mm	3.0mm	1,000
16 5/8				1,000
19 3/4				1,000
25 1				500
30 1-3/16				500
35 1-3/8				400
40 1-5/8				400
45 1-3/4				300
50 2				300
55 2-3/16				250
60 2-3/8				250
70 2-3/4	150			
4.8x13 #10x1/2	1.6-4.0	9.3mm	3.2mm	500
16 5/8				500
19 3/4				500
25 1				500
30 1-3/16				300
35 1-3/8				300
40 1-5/8				300
45 1-3/4				300
50 2				250
55 2-3/16				250
60 2-3/8				250
70 2-3/4	150			

Cross recess Flat head




SIZE	Panel Thickness	dk	k	Box q'ty / pcs
3.5x9.5 #6x3/8	0.9-1.6mm	6.7mm	2.5mm	2,000
13 1/2	0.9-2.3mm	6.7mm	2.5mm	1,000
16 5/8				1,000
19 3/4				1,000
4.2x9.5 #8x3/8	0.9-1.6mm	8.0mm	3.0mm	1,000
13 1/2	1.5-3.2mm	8.0mm	3.0mm	1,000
16 5/8				1,000
19 3/4				1,000
25 1				500
30 1-3/16				500
35 1-3/8				400
40 1-5/8				400
45 1-3/4				300
50 2				300
55 2-3/16				250
60 2-3/8				250
4.8x16 #10x5/8	1.6-4.0mm	10.0mm	3.3mm	500
19 3/4				500
25 1				500
30 1-3/16				300
35 1-3/8				300
40 1-5/8				300
45 1-3/4				250
50 2				250
60 2-3/8	150			

Hex head




SIZE	Panel Thickness	dk	k	Box q'ty / pcs			
4.8x16 #10x5/8	2.8-4.5mm	10.5mm	4.5mm	500			
19 3/4				500			
25 1				500			
35 1-3/8				300			
40 1-5/8				250			
45 1-3/4				250			
50 2				200			
60 2-3/8				150			
70 2-3/4				150			
6.3x19 #14x3/4				2.8-6.0mm	13.0mm	6.0mm	300
25 1							250
30 1-3/16	200						
35 1-3/8	200						
40 1-5/8	150						
45 1-3/4	150						
50 2	100						
60 2-3/8	100						
70 2-3/4	80						
90 3-1/2	50						
105 4-1/8	200						
115 4-1/2	150						
135 5-5/16	150						

Cross recess Thinwasher head




SIZE	Panel Thickness	dk	k	Box q'ty / pcs
4.2x13 #8x1/2	1.5-3.2mm	11.0mm	2.5mm	1000
16 5/8				1000
19 3/4				700
25 1				500
30 1-3/16				400
35 1-3/8				400
40 1-5/8				300
50 2				250
4.8x19 #10x3/4	1.5-3.2mm	12.5mm	3.5mm	500
25 1				400
35 1-3/8				300
45 1-3/4				200
50 2				200
60 2-3/8				150
70 2-3/4				100
80 3-5/32				100
100 4	100			

Cross recess Flex head with wings




SIZE	Panel Thickness	dk	k	Box q'ty / pcs
4.2x28 #8x1-7/64	1.5-3.0mm	7.0mm	2.3mm	500
32 1-1/4				500
37 1-1/2				400
45 1-3/4				300
50 2				300
4.8x45 #10x1-3/4	1.5-4.0mm	9.5mm	3.3mm	200
60 2-3/8				150
70 2-3/4				150

Cross recess Bugle head Drywall




SIZE	Panel Thickness	dk	Box q'ty / pcs
2.9x19 #4x3/4	thin steel plate	7.0mm	2,000
3.5x22 #6x7/8	thin steel plate max 1.0mm	7.5mm	1,000
25 1			1,000
32 1-1/4			1,000
41 1-5/8			500

Cross recess Flat head Drywall



SIZE	Panel Thickness	dk	Box q'ty / pcs
2.9x19 #4x3/4	thin steel plate	7.0mm	2,000
3.5x22 #6x7/8	thin steel plate max 1.0mm	7.5mm	1,000
25 1			1,000
32 1-1/4			1,000
41 1-5/8			500




Prompt shipment from our stock with Small Box q'ty!



HIGH SPEED & HIGH QUALITY
SAIMA CORPORATION


410SSP-1000 Self Drilling Screw

**Cross recess
Flat small head (D=6)**
Suitable for Aluminum window frame.




SIZE	Panel Thickness	dk	k	Box q'ty / pcs				
4.2x9.5	#8x3/8	0.9-2.1mm	0.0354"-0.0826"	6.0mm	0.2362"	1.6mm	0.0630"	2,000
13	1/2	1.5-2.8mm	0.0590"-0.1102"	6.0mm	0.2362"	1.6mm	0.0630"	1,000
16	5/8							1,000
19	3/4							1,000
25	1							500
30	1-3/16							500
35	1-3/8							500
40	1-5/8							500

**Cross recess
Flat small head (D=6)**
Machine screw thread
Suitable for Aluminum window frame.



SIZE	Panel Thickness	dk	k	Box q'ty / pcs			
M4x9.5	0.9-2.1mm	0.0354"-0.0826"	6.0mm	0.2362"	1.6mm	0.0630"	2,000
13	1.5-2.8mm	0.0590"-0.1102"	6.0mm	0.2362"	1.6mm	0.0630"	1,000
16							1,000
19							1,000
25							500
30							500


**Cross recess
Pan small head (D=6)**
Machine screw thread
Suitable for Aluminum window frame.



SIZE	Panel Thickness	dk	k	Box q'ty / pcs			
M4x9.5	1.5-2.8mm	0.0590"-0.1102"	8.0mm	0.3150"	3.0mm	0.1181"	2,000
13							1,000
16							1,000
19							1,000
25							500
30							500




**Cross recess
Pan head
for Concrete**




SIZE	dk	D	Box q'ty / pcs			
4.2x25	#8x1	8.0mm	0.3150"	3.4mm	0.1339"	200
32	1-1/4	9.0mm	0.3543"	4.3mm	0.1693"	200
4.8x25	#10x1					200
35	1-3/8	200				

**Cross recess
Flat head
for Concrete**




SIZE	dk	D	Box q'ty / pcs			
4.2x25	#8x1	7.0mm	0.2756"	3.4mm	0.1339"	200
32	1-1/4	10.0mm	0.3937"	4.3mm	0.1693"	100
4.8x25	#10x1					80
35	1-3/8	80				

**Cross recess
Pan head
Quadrex**



SIZE	Panel Thickness	dk	k	Box q'ty / pcs				
4.2x13	#8x1/2	1.5-3.2mm	0.0590"-0.1259"	8.0mm	0.3150"	3.0mm	0.1181"	1,000
16	5/8							1,000
19	3/4							1,000
25	1							500

**Cross recess
Flat head
Quadrex**



SIZE	Panel Thickness	dk	k	Box q'ty / pcs				
4.2x13	#8x1/2	1.5-3.2mm	0.0590"-0.1259"	8.0mm	0.3150"	3.0mm	0.1181"	1,000
16	5/8							1,000
19	3/4							1,000
25	1							500

Prompt shipment from our stock with Small Box q'ty!



HIGH SPEED & HIGH QUALITY

SAIMA CORPORATION

2-9-17 Tsujido, Fujisawa, Kanagawa, 251-0047, Japan
Office : China · Malaysia · Singapore · Vietnam

+81-466-36-3656

info@saima.co.jp

+81-466-36-0009

www.saima.co.jp



2009.Feb.